AMBIENT AIR MONITORING NETWORK PLAN

2012



STATE OF NEVADA DIVISION OF ENVIRONMENTAL PROTECTION BUREAU OF AIR QUALITY PLANNING

Contact: Daren Winkelman Ambient Monitoring Program Bureau of Air Quality Planning 901 S. Stewart Street, Suite 4001 Carson City, Nevada89701 (775) 687-9342 or (775) 687-6396 fax

Email: dwinkelman@ndep.nv.gov

Table of Contents

List of Figures and Tables	iii
Acronyms and Abbreviations	iv
Overview	1
Goals	1
Background	2
Network Design	3
Minimum Monitoring Requirements	4
Changes in Monitoring Network	5
Purpose of Monitors	6
Overview of Monitored Parameters	7
Site Information.	10
Appendix A	28
Appendix B	29
Annendix C	30

List of Figures

Figure 1 – Site Map9	9
Figure 2 – Elko Grammar School	11
Figure 3 – West End Elementary School	13
Figure 4 – Harvey's Casino and Resort	15
Figure 5 – Fernley Intermediate School	17
Figure 6 – 3300 E. Fifth Street.	19
Figure 7 – Church Site	21
Figure 8 – Manse Elementary2	23
Figure 9 – 145 Glen Oaks Street	25
Figure 10 – 8825 N. Linda	27
List of Tables	
Table 1 – NDEP's Ambient Air Monitoring Network	4
Table 2- NDEP's Minimum Monitoring Requirements by Pollutant 5	5

Acronyms and Abbreviations

CAA: Clean Air Act

AQS: Air Quality System

BAQP: Bureau of Air Quality Planning

BAM: Beta Attenuation Monitor

CFR: Code of Federal Regulations

CO: Carbon Monoxide

DCNR: Department of Conservation and Natural Resources

FEM: Federal Equivalent Method

FRM: Federal Reference Method

IMPROVE: Interagency Monitoring of Protected Visual Environments

NAAQS: National Ambient Air Quality Standard

NAC: Nevada Administrative Code

NDEP: Nevada Division of Environmental Protection

 O_3 : Ozone

PM: Particulate Matter (2.5 or 10 microns)

SLAMS: State and Local Air Monitoring Station

SPMS: Special Purpose Monitoring Station

USEPA: United States Environmental Protection Agency

This Page Intentionally Left Blank

Overview

The monitoring program of the Nevada Division of Environmental Protection (NDEP) operates an ambient air quality monitoring network of gaseous and particulate pollutant monitors. The monitors are located in small communities throughout rural Nevada. In the metropolitan areas of Reno and Las Vegas; the Washoe County District Health Department, Air Quality Management Division and the Clark County Department of Air Quality and Environmental Management operate and maintain their respective monitoring networks separate from NDEP and submit their Network Plan independently to the United States Environmental Protection Agency (USEPA).

NDEP regulates air quality to protect public health and the environment. Monitoring data is a crucial component of regulations used to determine compliance with the USEPA primary and secondary air quality standards. Other important uses of these monitors include: support and issuance of air quality forecasts, support of long-term health assessments, and tracking long-term air quality both to gauge effectiveness of emission control and abatement strategies and to quantify accuracy of ambient pollutant monitoring.

Goals

NDEP created an ambient air quality monitoring program to provide useful and accurate information on air quality, which is used to evaluate the success of the State's air quality programs. The Clean Air Act of 1970, and subsequent amendments, defines air quality standards for various air pollutants necessary to protect the public from injurious pollution concentrations. Air pollution concentrations that exceed the National Ambient Air Quality Standard (NAAQS) can cause a public health hazard, nuisance, annoyance, or damage to flora, fauna and personal property.

The NAAQS, published by the USEPA, can be found in 40 Code of Federal Regulations (CFR) Part 50, which defines the levels of air quality necessary to protect human health and welfare. An area is considered to be in nonattainment for a pollutant if it has violated the NAAQS for that pollutant. The CFR includes procedures for evaluating measured air quality

against the NAAQS. State air quality standards can be found in Nevada Administrative Code (NAC) 445B.22097.

Background

The State of Nevada has three jurisdictions which independently manage their own air programs as designated by statute: Department of Conservation and Natural Resources (DCNR), Division of Environmental Protection (NDEP), Bureau of Air Quality Planning (BAQP); Washoe County District Health Department, Air Quality Management Division; and Clark County Department of Air Quality and Environmental Management.

State agencies that conduct ambient air monitoring using State and Local Air Monitoring Stations (SLAMS) or Special Purpose Monitoring Stations (SPMS), must use Federal Reference Methods (FRM) or Federal Equivalent Methods (FEM) that comply with federal quality assurance requirements listed in 40 CFR 58, Appendix A. In conjunction with the Network Plan, a BAQP quality assurance plan was developed to form the framework for planning, implementing, assessing and reporting work performed by the BAQP and for implementing quality assurance and quality control protocols.

The Ambient Air Monitoring Program Quality Assurance Project Plan (QAPP) was developed to address quality management as well as quality assurance. The QAPP defines the policies, procedures, specifications, standards, and documentation necessary to: 1) provide data of adequate quality to meet monitoring objectives, and 2) minimize loss of air quality data due to malfunctions or out-of-control conditions. As part of the QAPP, the Quality Management Plan (QMP) describes the organizational structure, functional responsibilities of management and staff, lines of authority, and required interfaces between planning, implementing, assessing and reporting activities involving environmental data operations.

Additionally, the BAQP has developed ambient monitoring guidelines in order to ensure that ambient air quality data collected, at regulated facilities in the State, are of the highest quality and conform to federal requirements for quality assurance listed under 40 CFR 58.

Ambient air quality monitoring data must be certified on an annual basis as accurate and complete. The certification process begins with the complete submittal of all SLAMS data to the federal Air Quality System (AQS) for the calendar year. Submittal of data into AQS for 2010 has been accomplished. BAQP is planning on completing the entry of 2011 data into AQS by the May 1, 2012, deadline. Precision and accuracy reports and certification of that data should also be submitted within that time frame.

Network Design

There are currently nine ambient air quality monitoring stations in Nevada under the jurisdiction of NDEP. Air quality monitoring is represented entirely by SLAMS. The ozone monitoring conducted by NDEP is done on a seasonal basis from April 1 to October 31 of each year. The EPA's approval of a seasonal ozone monitoring schedule for NDEP is documented in Appendix A. There are two meteorological stations, one in Carson City and the other in Pahrump. These are used to confirm the local meteorological data from the monitoring stations.

In addition to these three independent monitoring networks, air quality monitoring is conducted through the Interagency Monitoring of Protected Visual Environments (IMPROVE) network by the federal land management agencies. There are two IMPROVE monitoring sites in Nevada, at the Jarbidge Wilderness area and Great Basin National Park, Lehman Caves.

The following table shows the locations and types of monitors operated by NDEP.

Table 1: NDEP'S Ambient Air Monitoring Network

Location	Ozone	Carbon Monoxide	PM10
Elko			1 (SLAMS)
Fallon	1 (SLAMS)		
Stateline- Harvey's		1 (SLAMS)	
Fernley	1 (SLAMS)		
Carson City-5th Street	1(SLAMS)		
Pahrump-Church Site			1 (SLAMS)
Pahrump-Manse Elementary			1 (SLAMS)
Pahrump-Glen Oaks			1 (SLAMS)
Pahrump-Linda Street			1 (SLAMS)
Total	3	1	5

SLAMS - State and Local Air Monitoring Station

Minimum Monitoring Requirements

The USEPA provides minimum site requirements for ozone and particulate matter based on metropolitan statistical area (MSA) population. The NDEP's air monitoring network meets or, in most cases, exceeds the minimum network requirements. The monitors currently required in the NDEP monitoring network by the USEPA are located in Stateline (CO), Carson City (O₃), Fallon (O₃), Fernley (O₃) and Pahrump (PM₁₀). The Stateline monitoring site is a continuation of a highest concentration site started by the California Air Resources Board (CARB). Through a Maintenance Plan with USEPA, monitoring and maintenance of this site was assumed by NDEP in August 2006. The four PM₁₀ monitoring sites in Pahrump are required through a Memorandum of Understanding (MOU) between NDEP, USEPA, Nye County and the Town of Pahrump. Otherwise, according to 40 CFR Part 58 Appendix D: Tables D-4 and D-5; sections 4.2, 4.3.2, 4.3.3, 4.4.2 and 4.5, additional monitoring for criteria pollutants is not presently required. The following table outlines the minimum required monitors within the NDEP ambient air monitoring network.

.

Table 2: Minimum Monitoring Requirements by Pollutant

Pollutant	Minimum # of Monitors Required	# of Monitors Active	# of Monitors needed	Location	MSA/CSA	County(ies)	County Pop. (2009)	Design Values
				Carson City	Carson City MSA	Carson City	55,176	66 ppb (2009- 2011)
Ozone	3	3	0	Fallon	Fallon MSA	Churchill	24,897	59 ppb (2009- 2011)
				Fernley	Rural	Lyon	52, 641	64 ppb (2009- 2011)
СО	1	1	0	South Lake Tahoe	Sacramento-Arden- Truckee CSA	Douglas	45, 464	3.1 ppm (2010- 2011)
Lead*	0	0	0	N/A	N/A	N/A	N/A	N/A
SO2*	0	0	0	N/A	N/A	N/A	N/A	N/A
NO2*	0	0	0	N/A	N/A	N/A	N/A	N/A
				Elko (1)	Elko MSA	Elko	47,896	0.8 (2009- 2011)
PM10	4	5	0	Pahrump (4)	Pahrump MSA/Las Vegas-Paradise- Pahrump CSA	Nye	44,324	Manse = 2.5 Church = 0.0 Glen Oaks = N/A Linda Street = 0.0 (2009-2011)
Total	8	9	0					

*Based on 40 CFR Part 58 Appendix D: Tables D-4 and D-5; sections 4.2, 4.3.2, 4.3.3, 4.4.2 and 4.5, additional monitoring for criteria pollutants is not presently required. Additionally, based on the 2008 Lead NAAQS Final Rule, 2010 SO₂ NAAQS Final Rule and the 2010 NO₂ NAAQS Final Rule, NDEP is not required to monitor for these criteria pollutants.

Changes in Monitoring Network

Over the next 12 months, two significant changes will occur throughout the monitoring network that will impact data submittal for the 2012 year. NDEP will be relocating the ozone monitor currently located at the Carson City Maintenance Yard, to a comparable location 2.5 miles west at a vacant lot with access from Carson Street. This move is necessitated by the city of Carson City re-purposing use of this location. Currently, there are plans and agreements for NDEP to begin moving equipment to this new site with objective to gain 9 months of collocated data until March 2013, which is the approximate date that the NDEP must move from the Carson City Maintenance Yard. The USEPA will be notified when data collection and submittal at the new monitoring site is commenced. The second change will be the removal of the Stateline CO monitor. The NDEP plans to discontinue CO monitoring

at Stateline (located at Harvey's Resort and Hotel on Hwy 50) by June 30, 2012. The NDEP concludes that 33 years of clean data, all of it under 80 percent of the NAAQS and most recently at 34 percent, with on-going downward trends is sufficient evidence of continued attainment through 2024 and satisfies 40 CFR 58.14 requirements for discontinuance.

In 2011, NDEP was informed that we had to relocate our PM₁₀ monitor located at the Manse School in Pahrump due to the school closing. In February 2011, NDEP submitted a letter to the EPA requesting approval to relocate the monitor. In March of 2011, NDEP received approval to move the existing monitor to the Nye County School District building. However, the Pahrump School District found a new use for the school allowing NDEP to remain at the existing site. At this time, NDEP will continue to monitor at the Manse School. If needed, NDEP has access to the Nye County School District building for our back-up site.

For the next year, NDEP will be evaluating the need to establish a PM_{2.5} monitoring network. Over the next five years, through 2017, NDEP will evaluate our current network to determine if any new sites or monitors need to be added to the existing monitoring network.

Purpose of Monitors

The purpose of the Nevada Air Monitoring Network is to provide useful and accurate information on air quality, which is used to evaluate the success of the State's air quality programs. To accomplish this task, the NAAQS is used to identify the criteria pollutants: CO (Carbon Monoxide), Pb (Lead), NO₂ (Nitrogen Dioxide), O₃ (Ozone), particulate matter (PM₁₀ and PM_{2.5}), and SO₂ (Sulfur Dioxide). Measuring pollutant concentrations in outdoor air and comparing the measured concentrations to corresponding standards help to classify ambient air quality status of an area as either attainment or nonattainment. The NAAQS is broken down into primary and secondary standards. Primary standards are those established to protect public health. Secondary standards are those established to protect the public welfare from adverse pollution effects on soils, water, vegetation, man-made materials, animals, weather, visibility, climate, property, and the economy. The scientific criteria upon which the standards are based are reviewed periodically by the USEPA, who may reestablish or change the standards according to its findings.

A pollutant measurement that is greater than the ambient air quality standard for its specific averaging time is called an exceedance. This is not necessarily a synonym for a violation; for each pollutant there are specific rules about how many exceedances are allowed in a given time period before a pattern of exceedances is considered to be a violation of the NAAQS. A violation may result in regulatory action to clean-up the area's air. Exceptions are made to allow for certain limited exceedances of the standard that may occur, for example, during an unusual weather pattern or wildfire (exceptional events). Regulatory action is typically reserved for cases where the exceedances are too large or too frequent.

Historically, ambient air quality monitoring by BAQP has looked at trends in air quality to aid in the local planning process. Traffic, wood burning stoves, and growth related activities have prompted air quality monitoring in specific areas around the State. Data from these sites has led to public education and outreach to communities identifying the potential health effects caused by air pollutants in the environment. Ordinances controlling surface area disturbances and other related activities that produce dust have also been implemented with the help of the monitoring sites.

Overview of Monitored Parameters

Carbon Monoxide (CO)

CO is a poisonous gas that, when introduced into the bloodstream, inhibits the delivery of oxygen to body tissue. The health risk is greatest for individuals with cardiovascular disease.

Ozone (O₃)

Ground-level ozone, or photochemical smog, is not emitted into the atmosphere as ozone, but rather is formed by the reactions of other pollutants. The primary pollutants entering into this reaction, VOCs and oxides of nitrogen, create ozone in the presence of sunlight. Ozone is a strong irritant of the upper respiratory system and also causes damage to crops.

Particulate Matter (PM₁₀)


Particulate matter with an aerodynamic diameter of 10 microns or less is emitted from transportation and industrial sources. Exposure to particle pollution is linked to a variety of significant health problems ranging from aggravated asthma to premature death in people with heart and lung disease.

Fine Particulate Matter (PM_{2.5})

Fine particulate matter with a diameter of 2.5 microns or less is created primarily from industrial processes and fuel combustion. These particles are breathed deeply into the lungs. Exposure to particle pollution is linked to a variety of significant health problems ranging from aggravated asthma to premature death in people with heart and lung disease.

Site Map

Figure 1: A map showing the locations of the monitoring stations maintained in NDEP's network.

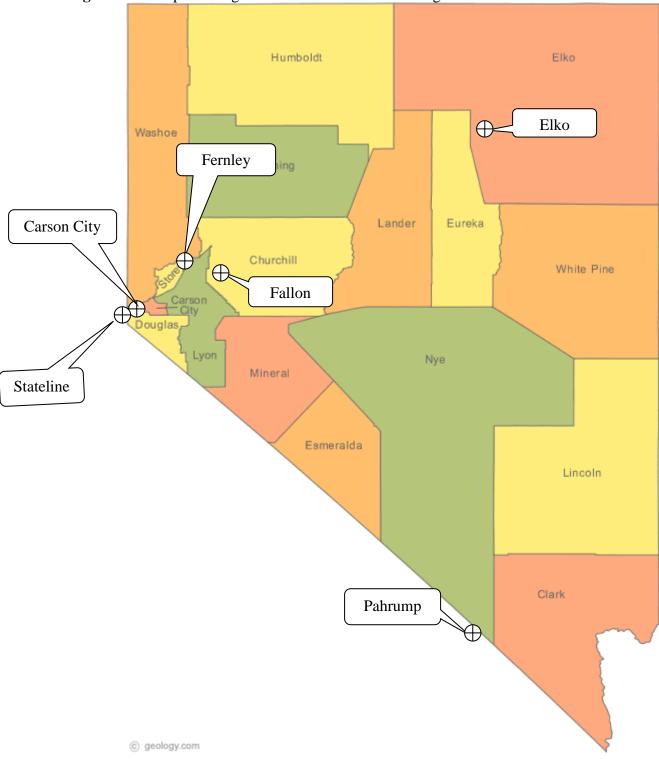

Map template from: http://geology.com/state-map/maps/nevada-county-map.gif

Elko: Detailed Site Information

Prior to 1992 the location for this sampler was the fire station at 723 Railroad Street (ID #32-007-003) in a commercial area. In November of 1992 this continuous PM_{10} monitoring site was relocated to the roof of the State offices at 850 Elm Street in a predominantly residential area. The monitoring objective was to determine typical concentration/population oriented. The manual sampler was replaced with a continuous (TEOM) PM_{10} monitor in December 1998. In September 2008, the TEOM monitor was closed and a new BAM 1020 monitor was sited at the Elko Grammar School #2.

Site Name	Elko
AQS ID	32-007-0005
GIS Coordinates	Lat +40.838350
	Long -115.766029
Location	Elko Grammar School #2
Address	1055 7 th Street
County	Elko
Distance to Road	18 Meters
Traffic Count	1400 AADT (2009) Station #0070203
Groundcover	Asphalt
Representative Area	Elko MSA

Pollutant	PM10 /81102
Monitor Objective	Typ. Conc./Population Oriented
Spatial Scale	Neighborhood
Sampling Method	Met One BAM-1020
Analysis Method	EQPM-0798-122
Start Date	09/25/2008
Operation Schedule	Continuous
Sampling Season	All Year
Probe Height	2.6 Meters
Dist. fm. supporting structure	Vertical Distance =1.2 meters
Dist. fm. obstructions on roof	N/A
Distance fm. trees	27 Meters
Distance to furnace or incinerator flue	N/A
Unrestricted airflow	360 degrees
Probe material	N/A
Residence time	N/A
Changes in the next 18 months?	No
Suitable for PM 2.5 comparison?	N/A
Frequency of flow rate verification	Monthly
Frequency of one point QC check (gaseous)	N/A
Last Annual Performance Evaluation (Gaseous)	N/A
Last two semi-annual flow rate audits for PM	12/12/11
	05/02/2012




Fallon: Detailed Site Information

The ozone monitoring site at 280 South Russell Street is at the West End Elementary School in a residential neighborhood that may be affected by agricultural operations surrounding the City of Fallon. The monitoring objective is to determine typical concentration/population orientation. PM_{10} sampling commenced at this site in May 1993 and was discontinued at the end of June 1998. Monitoring for ozone began in October 1999 as an ozone transport site downwind of Reno and Fernley

Site Name	Fallon
AQS ID	32-001-0002
GIS Coordinates	Lat +39.472471
	Long -118.783624
Location	West End of Elementary School
Address	280 South Russell Street
County	Churchill
Distance to Road	65 Meters
Traffic Count	410 AADT (2009) Station #0010135
Groundcover	Dirt and Gravel
Representative Area	Fallon MSA

Pollutant	O3/44201
Monitor Objective	Typ. Conc./Population Oriented
Spatial Scale	Neighborhood
Sampling Method	Teledyne API Model 400E
Analysis Method	EQOA-0992-087
Start Date	10/01/1999
Operation Schedule	Seasonal
Sampling Season	April thru October
Probe Height	3.2 Meters
Dist. fm. supporting structure	1 meter from wall
Dist. fm. obstructions on roof	N/A
Distance fm. Trees	Greater than 10 meters
Distance to furnace or incinerator flue	N/A
Unrestricted airflow	180 Degrees
Probe material	Teflon
Residence time	10 seconds
Changes in the next 18 months?	No
Suitable for PM 2.5 comparison?	N/A
Frequency of flow rate verification	N/A
Frequency of one point QC check (gaseous)	Semi-monthly
Last Annual Performance Evaluation (Gaseous)	09/22/2011
Last two semi-annual flow rate audits for PM	N/A

Figure 3: West End Elementary School, 280 S. Russell Street, Fallon, NV. Ozone Monitor

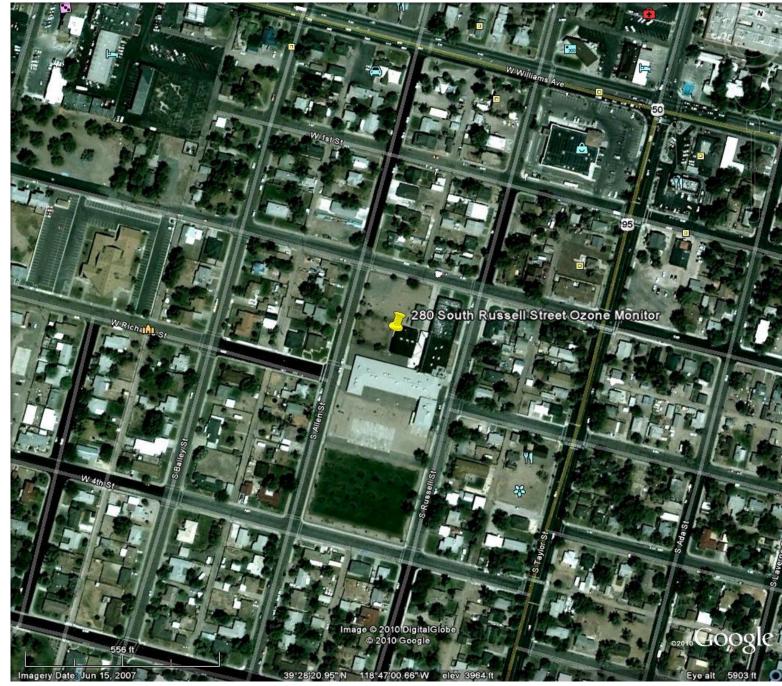


Harvey's Casino and Resort: Detailed Site Information

This is a "micro-scale" monitoring site for carbon monoxide in the core of the Stateline casino hotel area at Lake Tahoe. The site is designed to monitor the highest CO concentrations at Lake Tahoe, and is, taken to be representative of the California and Nevada sides of the south shore casino district. Monitoring at this site began in October 1999 and was previously conducted by the California Air Resources Board by multi-agency cooperative agreement. Starting in July of 2006, NDEP took over the monitoring responsibility for this site under a maintenance agreement with EPA.

Site Name	Harvey's Casino and Resort
AQS ID	32-005-0009
GIS Coordinates	Lat +38.960579
	Long -119.941351
Location	1 st Level of parking garage facing HWY
Address	Stateline NV 89449
County	Douglas
Distance to Road	9 Meters
Traffic Count	24,000 AADT (2009) Station # 0050044
Groundcover	Paved, asphalt and grass
Representative Area	Sacramento-Arden Arcade-Truckee CSA or rural MSA

Pollutant	CO/42101
Monitor Objective	Highest Concentration
Spatial Scale	Micro
Sampling Method	API Teledyne 300M
Analysis Method	N/A
Start Date	10/01/1999
Operation Schedule	Continuous
Sampling Season	All Year
Probe Height	2.5 Meters
Dist. fm. supporting structure	1 Meter Horizontally
Dist. fm. obstructions on roof	N/A
Distance fm. trees	4 Meters
Distance to furnace or incinerator flue	N/A
Unrestricted airflow	180 Degrees
Probe material	Teflon
Residence time	5 Seconds
Changes in the next 18 months?	Yes (Discontinuation)
Suitable for PM 2.5 comparison?	N/A
Frequency of flow rate verification	N/A
Frequency of one point QC check (gaseous)	Semi-monthly
Last Annual Performance Evaluation (Gaseous)	03/26/2012
Last two semi-annual flow rate audits for PM	N/A

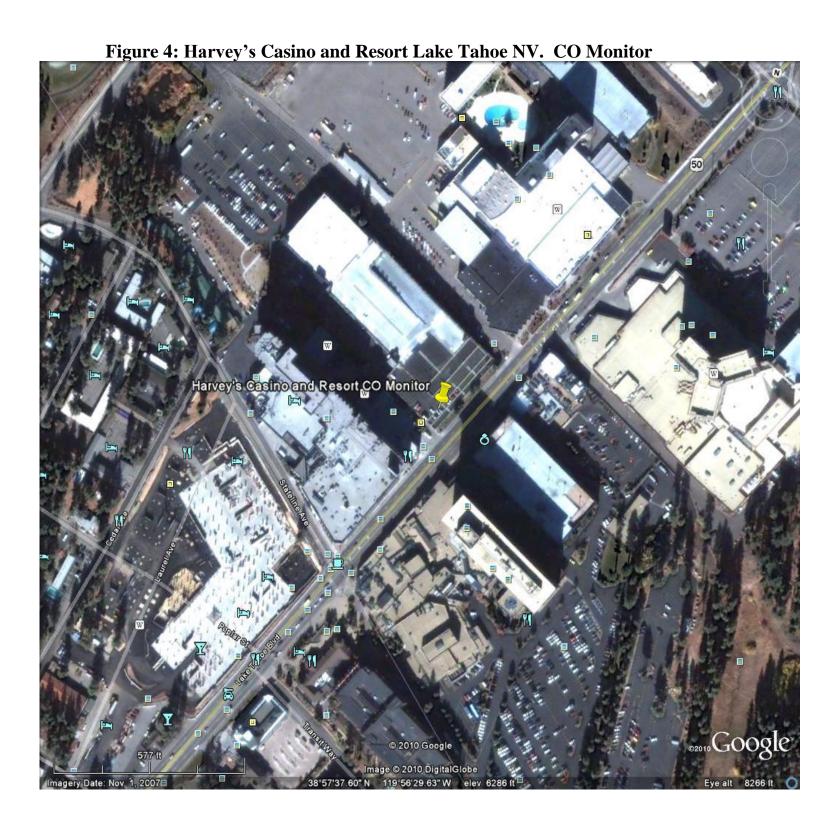

Fernley Intermediate School: Detailed Site Information

Ozone monitoring is done at the Fernley Intermediate School which is located at 320 Hardie Lane. This is an area of mainly residential and agricultural use. There has recently been a large growth of industry both upwind and downwind of this site. Monitoring for PM_{10} at this site commenced on May 1995, to determine the agricultural and industrial source impacts and population exposure. PM_{10} sampling was discontinued in November 1998. Ozone monitoring began at this site July 2007. However, ozone monitoring (SPMS) was previously conducted at the Fernley Volunteer Fire Department starting in October 1997 and discontinued on October 2003.

Site Name	Fernley
AQS ID	32-019-0006
GIS Coordinates	Lat +39.602787
	Long -119.247741
Location	Fernley Intermediate School
Address	320 Hardie Lane
County	Lyon
Distance to Road	119 Meters
Traffic Count	1300 AADT (2009) Station # 0190119
Groundcover	Paved, cement, gravel and dirt
Representative Area	Rural (Micropolitan Statistical Area)

Pollutant	O3/44201
Monitor Objective	Typ. Conc./Population Oriented
Spatial Scale	Urban
Sampling Method	Teledyne API Model 400E
Analysis Method	EQOA-0992-087
Start Date	07/06/2007
Operation Schedule	Continuous
Sampling Season	April to October
Probe Height	7 Meters
Dist. fm. supporting structure	Vertical Distance above 2.1 Meters
Dist. fm. obstructions on roof	N/A
Distance fm. trees	15 Meters
Distance to furnace or incinerator flue	N/A
Unrestricted airflow	360 Degrees
Probe material	Teflon
Residence time	4 Seconds
Changes in the next 18 months?	No
Suitable for PM 2.5 comparison?	N/A
Frequency of flow rate verification	N/A
Frequency of one point QC check (gaseous)	Semi-monthly
Last Annual Performance Evaluation (Gaseous)	09/22/2011
Last two semi-annual flow rate audits for PM	N/A

Figure 5: Fernley Intermediate School, 320Hardie Lane Fernley NV PM 2.5/Ozone Monitor



3300 E. 5th Street: Detailed Site Information

This site is located at 3300 East Fifth Street near the Carson City Public Works Department maintenance yard in a transition area, adjacent to wetlands, the City yard, sewage treatment plant, residential neighborhood and the new highway extension of US 395. The pollutants monitored included carbon monoxide and ozone (through 1989) and PM_{10} (March 1991- February 1997). The monitoring objective is to determine typical concentration/population oriented. In 2007, an existing meteorological station was restarted, and as previously stated, the ozone monitor from Long Street site was relocated to East Fifth Street. At the end of 2009, the $PM_{2.5}$ was relocated to this monitoring site.

Site Name	East 5 th . Street	was relocated to this monitoring site.	
AQS ID	32-510-0002		
GIS Coordinates	Lat +39.167247		
	Long -119.731702		
Location	Carson City		
Address	3300 East 5 th Street		
County	Carson		
Distance to Road	10 Meters		
Traffic Count	3,500 AADT (2009)	Station #0250116	
Groundcover	Dirt – Asphalt Park	ing Lot	
Representative Area	Carson City MSA		
Pollutant		Ozone/44201	
Monitor Objective		Typ. Conc./ Population Oriented	
Spatial Scale		Neighborhood	
Sampling Method		Teledyne API Model 400E	
Analysis Method		EQOA-0992-087	
Start Date		1/1/1989	
Operation Schedule		April – October	
Sampling Season		Seasonal	
Probe Height		10 Meters	
Dist. fm. supporting struct		Vertical distance above 7 meters	
Dist. fm. obstructions on re	oof	N/A	
Distance fm. trees		N/A	
Distance to furnace or inci	nerator flue	N/A	
Unrestricted airflow		360 Degrees	
Probe material		Teflon	
Residence time		6 Seconds	
Changes in the next 18 months?		Yes	
Suitable for PM 2.5 comparison?		N/A	
Frequency of flow rate verification		N/A	
Frequency of one point QC check (gaseous)		Semi-monthly	
Last Annual Performance Evaluation		9/28/2011	
(Gaseous)			
Last two semi-annual flow rate audits for PM		N/A	



Church: Detailed Site Information

The Church Site began operation in 2004 to complement the existing three other sites in the Pahrump monitoring network. Monitoring is accomplished with a continuous beta attenuated monitor located in the southeast corner of the Catholic Church. This site represents the southern-most monitoring in Pahrump Valley. The monitoring objective of this site is a significant source of PM_{10} . The surrounding area represents residential with little commercial, some native desert with a mix of dirt and paved roads.

Site Name	Church
AQS ID	32-023-0013
GIS Coordinates	Lat + 36.159639
	Long -115.996263
Location	Pahrump
Address	781 E. Gamebird
County	Nye
Distance to Road	100 Meters
Traffic Count	1,100 AADT (2009) Station #0230010
Groundcover	Desert
Representative Area	Pahrump MSA; Las Vegas – Paradise – Pahrump MSA

Pollutant	PM10/81102
Monitor Objective	Significant Sources – Dry lake bed 6 miles
	to the south
Spatial Scale	Urban
Sampling Method	Met One BAM 1020
Analysis Method	EQPM-0798-122
Start Date	2/14/2004
Operation Schedule	Continuous
Sampling Season	All Year
Probe Height	4 Meters
Dist. fm. supporting structure	Vertical distance above 2 meters
Dist. fm. obstructions on roof	N/A
Distance fm. trees	50Meters
Distance to furnace or incinerator flue	N/A
Unrestricted airflow	360 Degrees
Probe material	Aluminum
Residence time	N/A
Changes in the next 18 months?	No
Suitable for PM 2.5 comparison?	N/A
Frequency of flow rate verification	Monthly
Frequency of one point QC check (gaseous)	N/A
Last Annual Performance Evaluation	N/A
(Gaseous)	
Last two semi-annual flow rate audits for PM	11/3/2011
	5/7/2012



Manse Elementary: Site Detailed Information

The Manse site represents the monitoring objective for highest concentrations of PM_{10} in Pahrump. This site replaces the Community Pool site, which at the time it was operating, represented the highest concentrations of PM_{10} in Pahrump. Located at 1020 E. Wilson Road, the Manse Elementary site is located on the roof of the school and monitors for PM_{10} using the continuous beta attenuation monitor. The area adjacent to this site represents mostly commercial, some residential, and is adjacent to the busiest activity area of Pahrump. This site is located downwind from residential construction developments that have cleared large parcels of ground for building, as well as agricultural areas that cultivate large areas of farm-ground and raise livestock. Roads surrounding this site are both paved and dirt.

Site Name	Manse Elementary	
AQS ID	32-023-0014-81102-1	
GIS Coordinates	Lat +36.212787	
	Long -115.994802	
Location	Pahrump	
Address	1020 E. Wilson Road	
County	Nye	
Distance to Road	50 Meters	
Traffic Count	11,000 AADT (2006) Station #0230006	
Groundcover	Gravel Schoolyard	
Representative Area	Pahrump MSA; Las Vegas – Paradise – Pahrump MSA	

Pollutant	PM10/81102
Monitor Objective	Highest Concentrations
Spatial Scale	Neighborhood
Sampling Method	Met One BAM 1020
Analysis Method	EQPM-0798-122
Start Date	11/17/2005
Operation Schedule	Continuous
Sampling Season	All Year
Probe Height	3.0 Meters
Dist. fm. supporting structure	Vertical distance above 1 meter
Dist. fm. obstructions on roof	N/A
Distance fm. trees	10 Meters
Distance to furnace or incinerator flue	N/A
Unrestricted airflow	360 Degrees
Probe material	Aluminum
Residence time	N/A
Changes in the next 18 months?	No
Suitable for PM 2.5 comparison?	N/A
Frequency of flow rate verification	Monthly
Frequency of one point QC check (gaseous)	N/A
Last Annual Performance Evaluation	N/A
(Gaseous)	
Last two semi-annual flow rate audits for PM	11/3/2011
	5/7/2012

Figure 8: Manse Elementary, 1020 E. Wilson Road Pahrump, NV PM 10 Monitor 1020 E. Wilson Road PM 10 Monitor EWilson Rd © 2010 Google Imago USDA Farm Service Agency

36°12'45.90" N 115°59'40.98" W elev 2651 ft

Glen Oaks: Site Detailed Information

The Willow Creek site was started in 2003 and was located at 1500 Red Butte on the roof of a building in which irrigation equipment for the golf course is housed. The monitoring objective of this site was to measure typical concentrations/population oriented of PM_{10} using the beta attenuated monitor. The surrounding area adjacent to this site is fairway/golf course and residential structures. Due to closure of the golf course, the Willow Creek site was relocated to the Glen Oaks sewer treatment plant in 2009. The Glen Oaks site is a short distance away from the existing golf course site and the monitoring objective did not change.

Site Name	Glen Oaks
AQS ID	32-023-0012
GIS Coordinates	Lat +36.193469
	Long -116.007584
Location	Pahrump
Address	145 Glen Oaks St.
County	Nye
Distance to Road	200 Meters
Traffic Count	1,100 AADT (2009) Station #0230010
Groundcover	Grass/Gravel
Representative Area	Pahrump MSA; Las Vegas – Paradise – Pahrump MSA

Pollutant	PM10/81102
Monitor Objective	Typ. Conc./ Population Oriented
Spatial Scale	Neighborhood
Sampling Method	Met One BAM 1020
Analysis Method	EQPM-0798-122
Start Date	11/20/2003
Operation Schedule	Continuous
Sampling Season	All Year
Probe Height	6.0 Meters
Dist. fm. supporting structure	Vertical distance above 2 meters
Dist. fm. obstructions on roof	N/A
Distance fm. trees	12 Meters
Distance to furnace or incinerator flue	N/A
Unrestricted airflow	360 Degrees
Probe material	Aluminum
Residence time	N/A
Changes in the next 18 months?	No
Suitable for PM 2.5 comparison?	N/A
Frequency of flow rate verification	Monthly
Frequency of one point QC check (gaseous)	N/A
Last Annual Performance Evaluation (Gaseous)	N/A
Last two semi-annual flow rate audits for PM	11/3/2011
	5/7/2012

Figure 9: 145 Glen Oaks St., Pahrump, NV PM10 Monitor 145 Clen Oaks Street PM 10 Monitor © 2010 Google Imago USDA Farm Service Agency 11'36.43" N 116°00'26.64" W Imagery Date: May 25, 2006


Linda Street: Site Detailed Information

The Linda Street site was started in 2003 and is located at 8825 North Linda Street. The beta attenuated monitor is located on the roof of an old railroad box car and represents not only the northern-most site in the Pahrump monitoring network, but the most rural area. There is some residential surrounding this site, but mainly native desert vegetation with little or no surface disturbances. The monitoring objective for this site is general background levels of PM_{10} in Pahrump.

Site Name	Linda Street
AQS ID	32-023-0011-81102-1
GIS Coordinates	Lat +36.349408
	Long -116.031976
Location	Pahrump
Address	8825 N. Linda
County	Nye
Distance to Road	20 Meters
Traffic Count	2,200 AADT (2008) Station #0230008
Groundcover	Desert
Representative Area	Pahrump MSA; Las Vegas – Paradise – Pahrump MSA

Pollutant	PM10/81102
Monitor Objective	General Background
Spatial Scale	Urban
Sampling Method	Met One BAM 1020
Analysis Method	EQPM-0798-122
Start Date	5/3/2003
Operation Schedule	Continuous
Sampling Season	All Year
Probe Height	6.7 Meters
Dist. fm. supporting structure	Vertical distance above
	roof 3 meters
Dist. fm. obstructions on roof	N/A
Distance fm. trees	10 Meters
Distance to furnace or incinerator flue	N/A
Unrestricted airflow	360 Degrees
Probe material	Aluminum
Residence time	N/A
Changes in the next 18 months?	No
Suitable for PM 2.5 comparison?	N/A
Frequency of flow rate verification	Monthly
Frequency of one point QC check (gaseous)	N/A
Last Annual Performance Evaluation (Gaseous)	N/A
Last two semi-annual flow rate audits for PM	11/3/2011
	5/7/2012

Figure 10: 8825 N. Linda Pahrump, NV PM 10 Monitor

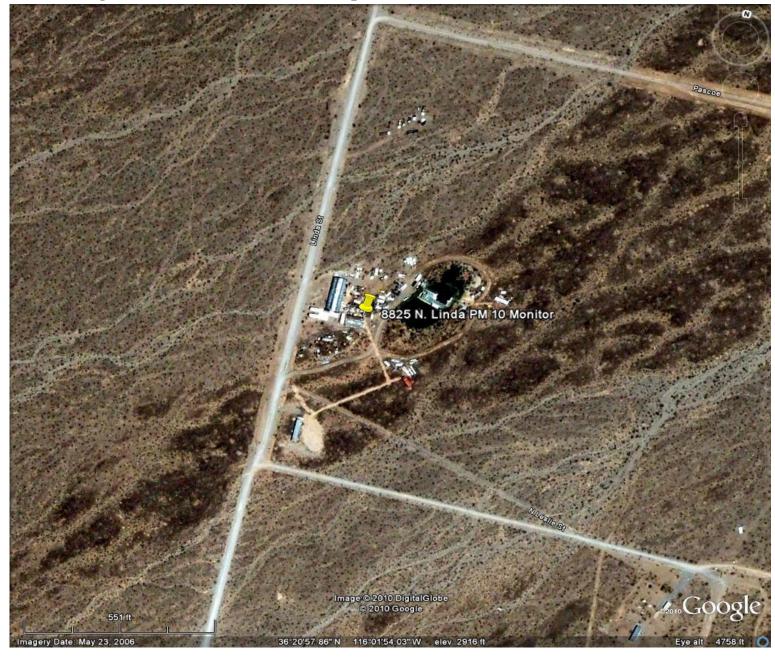

Appendix A. Ozone Seasonality Approval Letter

STEVE



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY REGION IX

75 Hawthorne Street San Francisco, CA 94105-3901

FEBRUARY 6, 2002

Mr. Chester Sergent, Supervisor
Ambient Air Monitoring Branch
Bureau of Air Quality Planning
Division of Environmental Protection
Department of Conservation and Natural Resources
333 W. Nye Lane, Room 138
Carson City, NV 89706

Dear Mr. Sergent:

I have received your letter of January 29, 2002 requesting permission to adjust the ozone monitoring season from year round to April 1 through October 31. We have reviewed the information you provided and approve your request to reduce the ozone monitoring season.

One issue that needs to be addressed is ensuring that EPA's AIRS database is updated to reflect this change in the ozone monitoring season. Failure to do so will result in AIRS showing incomplete ozone data capture rates for the Carson City, Fernley and Fallon monitoring sites. Please have your staff contact our AIRS database manager, Jim Forrest, at (415) 947-4135 to discuss the appropriate procedure for making this change. Please feel free to contact me at (415) 947-4128 if you have any questions.

Sincerely,

Robert S. Pallarino Technical Support Office

Air Division

cc: Colleen Cripps, DCNR/DEP Jim Forrest, US EPA

Appendix B. Manse PM10 Monitor Relocation Approval



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

REGION IX

75 Hawthorne Street
San Francisco, CA 94105-3901
MAR 2 2 2011

RECEIVED

MAR 2 5 2011

ENVIRONMENTAL PROTECTION

Nevada Environmental Protection

MAR 2 5 2011

BAPC/BAQP

Mr. Daren Winkelman, Supervisor Ambient Air Quality Monitoring Program Bureau of Air Quality Planning Nevada Division of Environmental Protection 901 South Stewart Street, Suite 4001 Carson City, NV 89701

RE: Response to discontinuation and relocation request of Manse Elementary SLAMS PM₁₀ monitor (AQS ID: 32-023-0014-81102-1)

Dear Mr. Winkelman:

On February 24, 2011 we received your official request for the discontinuation of the PM_{10} monitor at Manse Elementary School (AQS ID: 32-023-0014-81102-1) and the subsequent relocation of the PM_{10} monitor to the nearby Nye County School District office.

After a visit to the proposed relocation site and upon our review of the documentation you have provided, pursuant to 40 CFR 58.14, we approve your selection of the Nye School District building for replacement of the current Manse Elementary School site. Specifically, we have determined that your request meets the provisions under 40 CFR 58.14(c)(6), namely that logistical problems beyond NDEP's control make it impossible to continue operation at the current site and that the replacement site is a nearby location with the same scale of representation. We request that you list the official site address as 208 Dahlia Street, Pahrump, NV 89048 with GPS coordinates (in decimal degrees): 36.212989, -115.996875.

Thank you for your cooperation throughout this process and please feel free to contact Elfego Felix (415) 947-4141 from my staff or myself (415) 972-3851 with any questions or concerns in regards to this matter.

Sincerely,

Matthew Lakin, Manager Air Quality Analysis Office

Appendix C. Comment Submittal Information

The proposed 2012 Ambient Air Monitoring Network Plan is posted on the NDEP website for review and comment for thirty (30) days.

Comments may be emailed to
Daren Winkelman (dwinkelman@ndep.nv.gov)
or mailed to,
Daren Winkelman
Ambient Monitoring Program
Bureau of Air Quality Planning
901 S. Stewart Street, Suite 4001
Carson City, Nevada89701